




PRODUCT MATERIAL	Die-cast aluminium
LIGHT SOURCE	Bridgelux V8
MODULE LIFETIME	Approx. 35.000 hours
LED COOLING	Passive cooling
COLORS	See ring options
BEAM ANGLE	33°
ADJUSTABLE	No
SIZE	83 X 74MM

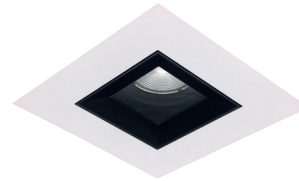

OPTIONS


DIMMABLE DRIVERS 350mA <small>IN COMBINATION WITH THIS LUMINAIRE. ADDITIONAL PRICE.</small>	1/10v Dimmable 350mA 10W art. no.: 0110.350.10.1	€ 29,50
	Phase-cut Dimmable 350mA 10W art. no.: 0110.350.10.1	€ 29,50
	Dimmable DALI 350mA 18W art. no.: 0118.350.75.0	€ 55,00
DIMMABLE DRIVERS 500mA <small>IN COMBINATION WITH THIS LUMINAIRE. ADDITIONAL PRICE.</small>	1/10v Dimmable 500mA 10W art. no.: 0110.500.10.1	€ 29,50
	Phase-cut Dimmable 500mA 10W art. no.: 0110.500.10.1	€ 29,50
	Dimmable DALI 500mA 18W art. no.: 0118.500.75.0	€ 55,00

INFORMATION

Incl. cable and plug.

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and lightsources.

ALPHA S WHITE / BLACK

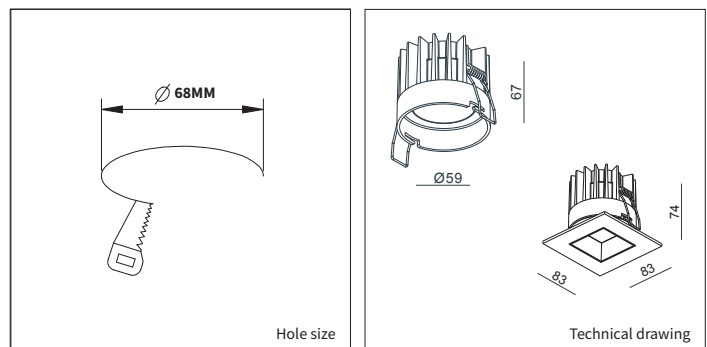

ART.NR.	COLOR	LAMP TYPE	BRAND	LUMINOUS FLUX	OUTPUT POWER	MODULE EFFICIENCY	COLOUR TEMPERATURE	CRI	TC LIFETIME	mA
5107.996.35.3	○ White	V8	Bridgelux	550LM	6,2W	88LM/W	2700K	>90	35.000 Hrs	350
5107.996.35.35	○● White / black	V8	Bridgelux	550LM	6,2W	88LM/W	2700K	>90	35.000 Hrs	350
5107.996.35.5	● Black	V8	Bridgelux	550LM	6,2W	88LM/W	2700K	>90	35.000 Hrs	350
5107.996.35.59	●● Black / gold	V8	Bridgelux	550LM	6,2W	88LM/W	2700K	>90	35.000 Hrs	350
5109.996.50.3	○ White	V8	Bridgelux	745LM	9,2W	80LM/W	2700K	>90	35.000 Hrs	500
5109.996.50.35	○● White / black	V8	Bridgelux	745LM	9,2W	80LM/W	2700K	>90	35.000 Hrs	500
5109.996.50.5	● Black	V8	Bridgelux	745LM	9,2W	80LM/W	2700K	>90	35.000 Hrs	500
5109.996.50.59	●● Black / gold	V8	Bridgelux	745LM	9,2W	80LM/W	2700K	>90	35.000 Hrs	500