



**BAN 9**

<b>PRODUCT MATERIAL</b>	Aluminium
<b>LIGHT SOURCE</b>	MR16/GU10 LED / LMR50
<b>DRIVER</b>	LMR 50 includes a driver
<b>COLORS</b>	<ul style="list-style-type: none"> <li>○ 3 = RAL 9003 white</li> <li>● 5 = RAL 9005 black</li> <li>● 6 = RAL 9006 alu</li> </ul>
<b>BEAM ANGLE</b>	
<b>ADJUSTABLE</b>	Yes
<b>SIZE</b>	92 X 70MM OR INCL. LMR 92X 90MM



**OPTIONS LMR**

<b>GLASS COVER CLEAR</b>	Glass IP44 art. no.: 0053.999.99.0	€ 7,50
<b>GLASS FILTER</b>	Filter 2400K glass art. no.: 4006.999.27.0	€ 30,00
<b>DIMMABLE DRIVERS 350mA</b> <i>IN COMBINATION WITH THIS LUMINAIRE. ADDITIONAL PRICE.</i>	1/10v Dimmable 350mA 10W art. no.: 0110.350.10.1	€ 29,50
	Phase-cut Dimmable 350mA 10W art. no.: 0110.350.10.1	€ 29,50
	Dimmable DALI 350mA 18W art. no.: 0118.350.15.1	€ 55,00

BAN 9



**INFORMATION**

**!** Only luminaire body, lightsource and/or driver excluded.

LMR includes a driver, cable and plug.

LMR **Dim to Warm** includes a dimmable driver, cable and plug.

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and lightsources.

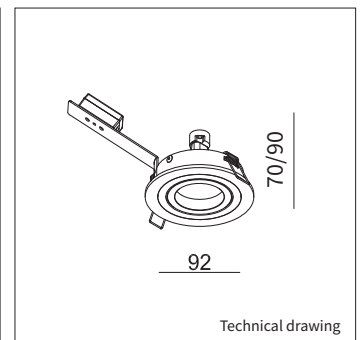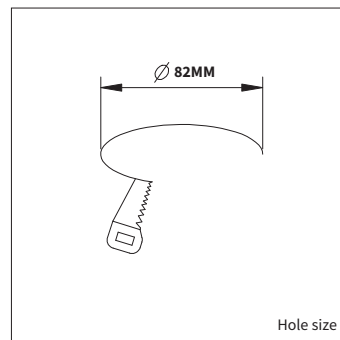

ART.NR.	LAMP TYPE	BRAND	LUMINOUS FLUX	OUTPUT POWER	MODULE EFFICIENCY	COLOUR TEMPERATURE	CRI	TC LIFETIME	BEAM ANGLE	mA	SALES PRICE
Δ see colors											
<b>!</b> 4545.001.98.Δ	MR16	~	~	Max. 50W	~	~	~	~	~	~	~
<b>!</b> 4545.002.98.Δ	Gu10	~	~	Max. 50W	~	~	~	~	~	~	~
4545.171.20.Δ	LMR50	Bridgelux V6	575LM	6,8W	85LM/W	2700K	>90	30.000 Hrs	20°	350	
4545.172.30.Δ	LMR50	Bridgelux V6	575LM	6,8W	85LM/W	2700K	>90	30.000 Hrs	30°	350	
4545.173.20.Δ	LMR50	Bridgelux V6	600LM	6,8W	88LM/W	3000K	>90	30.000 Hrs	20°	350	
4545.174.30.Δ	LMR50	Bridgelux V6	600LM	6,8W	88LM/W	3000K	>90	30.000 Hrs	30°	350	
4545.175.20.Δ	LMR50	Sharp GW6	563LM	6,6W	85LM/W	2000 - 2800K <b>DTW</b>	>80	30.000 Hrs	20°	350	
4545.176.30.Δ	LMR50	Sharp GW6	563LM	6,6W	85LM/W	2000 - 2800K <b>DTW</b>	>80	30.000 Hrs	30°	350	