



**BUSS 19**

<b>PRODUCT MATERIAL</b>	Steel and aluminium
<b>LIGHT SOURCE</b>	Philips DLM-S
<b>MODULE LIFETIME</b>	Approx. 30.000 hours
<b>LED COOLING</b>	Passive cooling
<b>DRIVER</b>	Incl. Intergrated Driver
<b>COLORSΔ</b>	<ul style="list-style-type: none"> <li>○ 3 = RAL 9003 white</li> <li>● 5 = RAL 9005</li> <li>● 6 = RAL 9006</li> </ul>
<b>BEAM ANGLE</b>	
<b>REFLECTOR</b>	Silver Glossy
<b>ADJUSTABLE</b>	No
<b>SIZE</b>	192 X 140MM



**OPTIONS**


<b>COLORS</b>	Available in all RAL colours on request. Additional price + 10%
<b>REFLECTOR</b>	White reflector on request.
<b>IP44 VERSION</b>	On request
<b>3 PHASE ADAPTER</b>	For track mounting € 35,00

BUSS 19

**INFORMATION**

<b>WARRANTY</b>	5 Years
-----------------	---------

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and lightsources.

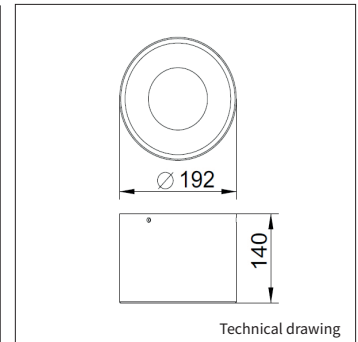

ARTICLE NO.	LAMP TYPE	BRAND	LIGHT OUTPUT	MODULE POWER	MODULE EFFICIENCY	CORRELATED COLOUR TEMPERATURE	COLOUR RENDERING INDEX	TC LIFE	mA
5186.103.80.3Δ	DLM-S	Philips	2000	26	70	3000	>80	30.000	>09,
5186.140.80.3Δ	DLM-S	Philips	2000	26	70	4000	>80	30.000	>09,