

CAP R1



<b>PRODUCT MATERIAL</b>	Die-cast Aluminium
<b>LIGHT SOURCE</b>	Bridgelux
<b>MODULE LIFETIME</b>	Approx. 50.000 hours
<b>LED COOLING</b>	Passive cooling
<b>DRIVER</b>	Incl. driver + cable and plug
<b>COLORS</b>	<input type="radio"/> 3 = RAL 9003 white <input type="radio"/> 5 = RAL 9005 black
<b>BEAM ANGLE</b>	28°
<b>ADJUSTABLE</b>	Yes
<b>SIZE</b>	105 X 77MM



OPTIONS LMR


<b>GLASS COVER CLEAR</b>	Glass IP44 art. no.: 0053.999.99.0	€ 7,50
<b>GLASS FILTER</b>	Filter 2400K glass art. no.: 4006.999.27.0	€ 30,00
<b>DIMMABLE DRIVERS 350mA</b> <i>IN COMBINATION WITH THIS LUMINAIRE. ADDITIONAL PRICE.</i>	1/10v Dimmable 350mA 10W art. no.: 0110.350.10.1	€ 29,50
	Phase-cut Dimmable 350mA 10W art. no.: 0110.350.10.1	€ 29,50
	Dimmable DALI 350mA 18W art. no.: 0118.350.15.1	€ 55,00

CAP R1


INFORMATION

<b>WARRANTY</b>	3 years
-----------------	---------

Δ = See color code.  
 This luminaire is "plug & play". Cable and plug included.  
 Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and lightsources.

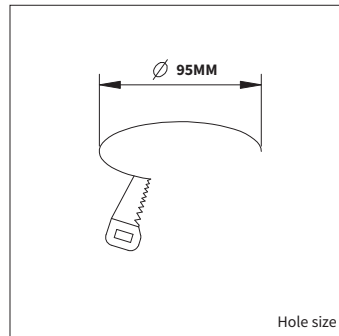

Hole size

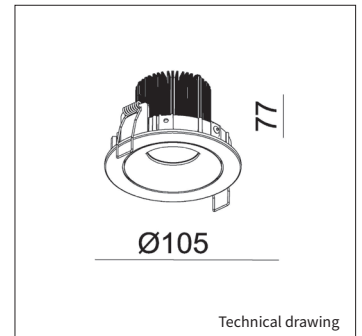

Technical drawing

ART.NR.	LAMP TYPE	BRAND	LUMINOUS FLUX	OUTPUT POWER	MODULE EFFICIENCY	COLOUR TEMPERATURE	CRI	TC LIFETIME	mA
4005.990.28.Δ	BXRA	Bridgelux	600LM	6,6W	86LM/W	2700K	>80	50.000 Hrs	350 mA

Δ see colors