



ESCAPE EXIT


PRODUCT MATERIAL	Aluminium
PANEL	Acrylic board with imprinted dot-matrix lens diffusion.
LIGHTSOURCE	SMD 3528 - 14PCS
LED COOLING	Passive cooling
COLORS (Δ)	3 = RAL 9003 white
VIEWING ANGLE	30M
SIZE	330 X 251 X 15MM

INFORMATION


MOUNTING OPTIONS	Wall surface Ceiling Side
PICTOGRAMS (INCL.)	<div style="display: flex; align-items: center;"> <div style="border: 1px solid black; width: 30px; height: 20px; margin-right: 5px;"></div> <div>1x Blanc</div> </div> <div style="display: flex; align-items: center; margin-top: 5px;"> <div style="border: 1px solid black; width: 30px; height: 20px; display: flex; align-items: center; justify-content: center;"> </div> <div>2x arrow up</div> </div> <div style="display: flex; align-items: center; margin-top: 5px;"> <div style="border: 1px solid black; width: 30px; height: 20px; display: flex; align-items: center; justify-content: center;"> </div> <div>2x arrow left/right</div> </div>
EMERGENCY BATTERY	Including sealed nickel-cadmium rechargeable battery pack (1Hr.)
AUTO MAINTENANCE	Once the unit is powered up it will automatically initiate a self test and diagnostics. Detailed specifications on request.
E N STANDARD	On request



ESCAPE EXIT

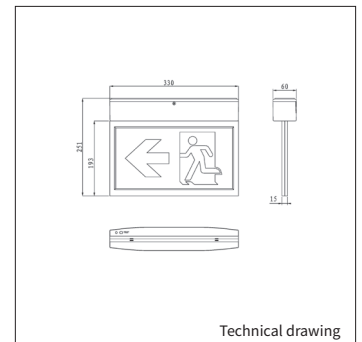

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and lightsources.

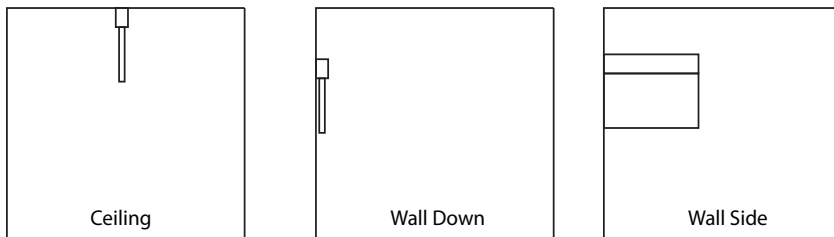

mounting possibilities

Em

ART.NR.	LAMP TYPE	LIGHT OUTPUT	EMERGENCY LUMEN OUTPUT	MODULE POWER	BATTERY CHARGE DURATION	BATTERY LIFETIME WHEN DISCONNECTED	BATTERY	VIEWING DISTANCE
0551.999.50.3	SMD LED 3528	50LM	8.86LM	4W	24 Hrs	1 Hr	Ni_Cd 3.6v 800mA	30M