## **KEY**LIGHT

## **ESCAPE SQUARE**

PRODUCT MATERIAL					
LIGHTSOURCE					
LED COOLING					
COLORS ( $\Delta$ )					
VIEWING ANGLE					
SIZE					

## Thermoplastic housing LED Passive cooling **3 =** RAL 9003 white Open area 140 X 125 X 38MM


## INFORMATION

COLOUR TEMP.	6000K				
MOUNTING OPTIONS	Wall / surface / 3F railsystem				
MAINTENTANT	Non-maintenant				
AUTO TEST	Yes				
EMERGENCY BATTERY	Including sealed nickel-cadmium				
	rechargeable battery pack (1Hr.)				
E N STANDARD	On request				

Keylight International reserves the right to modify or change technical, contruction or LED specifications due to continuous improvements of our products and lightsources.



ESCAPE SQUARE

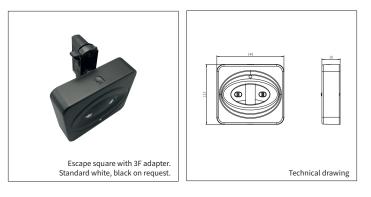

ART.NR.	LAMP TYPE	LIGHT OUTPUT	EMERGENCY LUMEN OUTPUT	MODULE POWER	BATTERY CHARGE DURATION	BATTERY LIFETIME WHEN DISCONNECTED	BATTERY	VIEWING DISTANCE
0554.999.18.3	LED	180LM	1Hrs / 180LM	2 X 3W	24 Hrs	1 Hr	Ni_Cd 7.2v 800mA	Escape Route
0554.300.33.3	LED (3 phase)	180LM	1Hrs / 180LM	2 X 3W	24 Hrs	1 Hr	Ni_Cd 7.2v 800mA	Escape Route