



LEDIMO 20

PRODUCT MATERIAL	Die-cast aluminium
ADAPTER	3-phase track adapter
LIGHT SOURCE	Fortimo SLM G6
MODULE LIFETIME	Approx. 50.000 hours
LED COOLING	Passive cooling
DRIVER	Incl. xitanium driver
COLORS (Δ)	<ul style="list-style-type: none"> ○ 3 = RAL 9003 white ● 5 = RAL 9005 black ● 6 = RAL 9006 alu
BEAM ANGLE	24°
ADJUSTABLE	Horizontally and vertically rotational
SIZE	231 X 172MM



OPTIONS

OPTIONAL BEAM ANGLES	12°	art. no.: 3021.012.00.0	€ 5,00
	36°	art. no.: 3021.036.00.0	€ 5,00
DIFFUSER	0180.999.99 (frosted diffuser)	€ 7,50	
DIFFUSER W/ HOLE	0185.999.99 (frosted diffuser)	€ 7,50	
BARN DOOR	3020.500.00.5	€ 24,50	

LEDIMO 20


INFORMATION

WARRANTY | 5 Years

Δ = product color code. See colors

Long-life patented LED cooling system.

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and lightsources. The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.

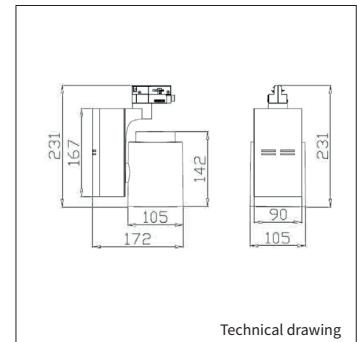

Technical drawing

AVAILABLE SLM OPTIONS

To order the correct product, please replace **COB*** in the article number field with the COB code found on the last page of the catalogue

ARTICLE NUMBER	LUMINOUS FLUX	BRAND	OUTPUT POWER	COLOUR TEMPERATURE	CRI	SETTING	POWER FACTOR
3020. COB* .24.Δ	1100	Philips SLM G6	7W	827 / 830 / 835 / 840 / 850	>80	High Efficiency	>0,9
3020. COB* .24.Δ	1100	Philips SLM G6	8W	927 / 930	>90	High Efficiency	>0,9
3020. COB* .24.Δ	1100	Philips SLM G6	7W	830 Premium White	>80	High Efficiency	>0,9
3020. COB* .24.Δ	1100	Philips SLM G6	8W	930 / 935 / 940 Premium White	>90	High Efficiency	>0,9
3020. COB* .24.Δ	1100	Philips SLM G6	10W	930 Crisp White (930 CW)	>90	High Efficiency	>0,9
3020. COB* .24.Δ	1100	Philips SLM G6	11W	Food Warm White (FWW)	84	High Efficiency	>0,9
3020. COB* .24.Δ	1100	Philips SLM G6	11W	Food Premium Red (FPR)	88	High Efficiency	>0,9
3020. COB* .24.Δ	2000	Philips SLM G6	13W	827 / 830 / 835 / 840 / 850	>80	High Efficiency	>0,9
3020. COB* .24.Δ	2000	Philips SLM G6	17W	927 / 930	>90	High Efficiency	>0,9
3020. COB* .24.Δ	2000	Philips SLM G6	14W	830 Premium White	>80	High Efficiency	>0,9
3020. COB* .24.Δ	2000	Philips SLM G6	16W	930 / 935 / 940 Premium White	>90	High Efficiency	>0,9
3020. COB* .24.Δ	2000	Philips SLM G6	21W	930 Crisp White (930 CW)	>90	High Efficiency	>0,9
3020. COB* .24.Δ	2000	Philips SLM G6	23W	Food Warm White (FWW)	84	High Efficiency	>0,9
3020. COB* .24.Δ	2000	Philips SLM G6	22W	Food Premium Red (FPR)	88	High Efficiency	>0,9
3020. COB* .24.Δ	3000	Philips SLM G6	19W	827 / 830 / 835 / 840 / 850 / 857	>80	High Efficiency	>0,9
3020. COB* .24.Δ	3000	Philips SLM G6	26W	927 / 930	>90	High Efficiency	>0,9
3020. COB* .24.Δ	3000	Philips SLM G6	20W	830 Premium White	>80	High Efficiency	>0,9
3020. COB* .24.Δ	3000	Philips SLM G6	25W	930 / 935 / 940 Premium White	>90	High Efficiency	>0,9
3020. COB* .24.Δ	3000	Philips SLM G6	32W	930 Crisp White (930 CW)	>90	High Efficiency	>0,9
3020. COB* .24.Δ	3000	Philips SLM G6	39W	Food Warm White (FWW)	84	High Efficiency	>0,9
3020. COB* .24.Δ	3000	Philips SLM G6	37W	Food Premium Red (FPR)	88	High Efficiency	>0,9
3020. COB* .24.Δ	4500	Philips SLM G6	29W	827 / 830 / 835 / 840 / 850 / 857	>80	High Efficiency	>0,9
3020. COB* .24.Δ	4500	Philips SLM G6	38W	927 / 930	>90	High Efficiency	>0,9
3020. COB* .24.Δ	4500	Philips SLM G6	30W	830 Premium White	>80	High Efficiency	>0,9
3020. COB* .24.Δ	4500	Philips SLM G6	37W	930 / 935 / 940 Premium White	>90	High Efficiency	>0,9
3020. COB* .24.Δ	4500	Philips SLM G6	45W	930 Crisp White (930 CW)	>90	High Efficiency	>0,9
3020. COB* .24.Δ	4500	Philips SLM G6	46W	Food Warm White (FWW)	84	High Efficiency	>0,9
3020. COB* .24.Δ	4500	Philips SLM G6	46W	Food Premium Red (FPR)	88	High Efficiency	>0,9

High efficiency is the standard Keylight setting for all SLM G6 LED modules. For technical and warranty information regarding high efficiency, see last page of the catalogue.