




<b>PRODUCT MATERIAL</b>	Aluminium and poly-carbonate
<b>LIGHT SOURCE</b>	SMD LED
<b>MODULE LIFETIME</b>	Approx. 40.000 hours
<b>LED COOLING</b>	Passive cooling
<b>DRIVER</b>	Incl. LED driver.
<b>COLORS (Δ)</b>	○ 3 = RAL 9003 white
<b>BEAM ANGLE</b>	▲ 120° <b>Wide beam</b>
<b>REFLECTOR PLATE</b>	Opal poly-carbonate diffuser
<b>ADJUSTABLE</b>	No
<b>SIZE</b>	300 X 300 X 40MM




**INFORMATION**

<b>WARRANTY</b>	3 Years
-----------------	---------

IP 54: For indoor use only

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and lightsources. The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.

METEOR SQ

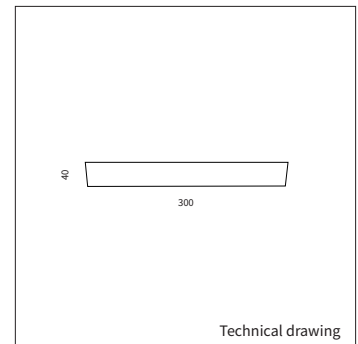

ART.NR.	LAMP TYPE	BRAND	LUMINOUS FLUX	OUTPUT POWER	MODULE EFFICIENCY	COLOUR TEMPERATURE	CRI	TC LIFETIME	POWER FACTOR
Δ see color									
5144.335.18.3	SMD LED	Epistar	1620LM	18W	90LM/W	4000K	>80	40.000 Hrs	>0,9