



PRODUCT MATERIAL	Die-cast aluminium + aluminium
LIGHT SOURCE	SLM G6
MODULE LIFETIME	Approx. 50.000 hours
LED COOLING	Passive cooling
DRIVER	Incl. Xitanium driver.
COLORS (Δ)	○ 3 = RAL 9003 white ● 5 = RAL 9005 black
BEAM ANGLE	24°
ADJUSTABLE	Yes
SIZE	156 X 224MM



OPTIONS



EMERGENCY BALLAST	0187.003.01 1 hours.	€ 180,00
OPTIONAL BEAM ANGLE	12° 3021.012.00.0	€ 5,00
	36° 3021.036.00.0	€ 5,00
DIFFUSER	0180.999.99 (frosted diffuser)	€ 9,50
DIFFUSER W/ HOLE	0185.999.99 (frosted diffuser)	€ 9,50
DIMMABLE	Dimmable DALI	€ 60,00

INFORMATION

WARRANTY	5 Years
-----------------	---------

Δ = product color code. See colors

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and lightsources. The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.

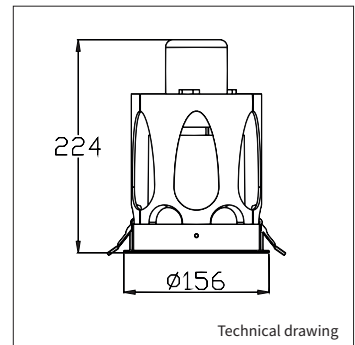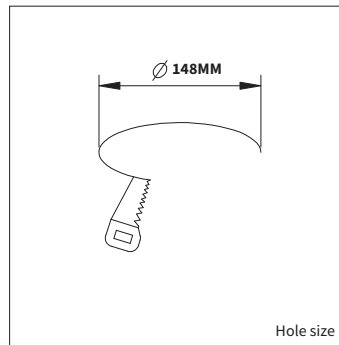

AVAILABLE SLM OPTIONS

To order the correct product, please replace **COB*** in the article number field with the COB code found on the last page of the catalogue

ARTICLE NUMBER	LUMINOUS FLUX	BRAND	OUTPUT POWER	COLOUR TEMPERATURE	CRI	SETTING	POWER FACTOR
Δ See colors							
4026.COB*.24.Δ	1100	Philips SLM G6	7W	827 / 830 / 835 / 840 / 850	>80	High Efficiency	>0,9
4026.COB*.24.Δ	1100	Philips SLM G6	8W	927 / 930	>90	High Efficiency	>0,9
4026.COB*.24.Δ	1100	Philips SLM G6	7W	830 Premium White	>80	High Efficiency	>0,9
4026.COB*.24.Δ	1100	Philips SLM G6	8W	930 / 935 / 940 Premium White	>90	High Efficiency	>0,9
4026.COB*.24.Δ	1100	Philips SLM G6	10W	930 Crisp White (930 CW)	>90	High Efficiency	>0,9
4026.COB*.24.Δ	1100	Philips SLM G6	11W	Food Warm White (FWW)	84	High Efficiency	>0,9
4026.COB*.24.Δ	1100	Philips SLM G6	11W	Food Premium Red (FPR)	88	High Efficiency	>0,9
4026.COB*.24.Δ	2000	Philips SLM G6	13W	827 / 830 / 835 / 840 / 850	>80	High Efficiency	>0,9
4026.COB*.24.Δ	2000	Philips SLM G6	17W	927 / 930	>90	High Efficiency	>0,9
4026.COB*.24.Δ	2000	Philips SLM G6	14W	830 Premium White	>80	High Efficiency	>0,9
4026.COB*.24.Δ	2000	Philips SLM G6	16W	930 / 935 / 940 Premium White	>90	High Efficiency	>0,9
4026.COB*.24.Δ	2000	Philips SLM G6	21W	930 Crisp White (930 CW)	>90	High Efficiency	>0,9
4026.COB*.24.Δ	2000	Philips SLM G6	21W	Food Warm White (FWW)	84	High Efficiency	>0,9
4026.COB*.24.Δ	2000	Philips SLM G6	20W	Food Premium Red (FPR)	88	High Efficiency	>0,9
4026.COB*.24.Δ	3000	Philips SLM G6	19W	827 / 830 / 835 / 840 / 850 / 857	>80	High Efficiency	>0,9
4026.COB*.24.Δ	3000	Philips SLM G6	26W	927 / 930	>90	High Efficiency	>0,9
4026.COB*.24.Δ	3000	Philips SLM G6	20W	830 Premium White	>80	High Efficiency	>0,9
4026.COB*.24.Δ	3000	Philips SLM G6	25W	930 / 935 / 940 Premium White	>90	High Efficiency	>0,9
4026.COB*.24.Δ	3000	Philips SLM G6	32W	930 Crisp White (930 CW)	>90	High Efficiency	>0,9
4026.COB*.24.Δ	3000	Philips SLM G6	34W	Food Warm White (FWW)	84	High Efficiency	>0,9
4026.COB*.24.Δ	3000	Philips SLM G6	32W	Food Premium Red (FPR)	88	High Efficiency	>0,9
4026.COB*.24.Δ	4500	Philips SLM G6	29W	827 / 830 / 835 / 840 / 850 / 857	>80	High Efficiency	>0,9
4026.COB*.24.Δ	4500	Philips SLM G6	38W	927 / 930	>90	High Efficiency	>0,9
4026.COB*.24.Δ	4500	Philips SLM G6	30W	830 Premium White	>80	High Efficiency	>0,9
4026.COB*.24.Δ	4500	Philips SLM G6	37W	930 / 935 / 940 Premium White	>90	High Efficiency	>0,9
4026.COB*.24.Δ	4500	Philips SLM G6	45W	930 Crisp White (930 CW)	>90	High Efficiency	>0,9
4026.COB*.24.Δ	4500	Philips SLM G6	46W	Food Warm White (FWW)	84	High Efficiency	>0,9
4026.COB*.24.Δ	4500	Philips SLM G6	46W	Food Premium Red (FPR)	88	High Efficiency	>0,9

High efficiency is the standard Keylight setting for all SLM G6 LED modules. For technical and warranty information regarding high efficiency, see last page of the catalogue. Standard system warranty is 5 years.