



PRODUCT MATERIAL	Die-cast aluminium
ADAPTER	3-phase track adapter
LIGHT SOURCE	PAR20
COLORS (Δ)	○ 3 = RAL 9003 white ● 5 = RAL 9005 black
BEAM ANGLE	▲ 25° ▲ 40°
ADJUSTABLE	Horizontally and vertically rotational
DIMMABLE	Standard
SIZE	209 X 99MM



OPTIONS

MONO POINT	Color 3 - 5 - 6	€ 35,00
-------------------	-----------------	---------


INFORMATION

WARRANTY	2 Years
-----------------	---------

* Specification may vary per type of lightsource

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and lightsources.

PAR 20

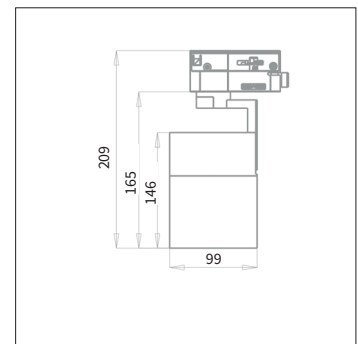

ART.NR.	LAMP TYPE	BRAND	LUMINOUS FLUX	OUTPUT POWER	MODULE EFFICIENCY	COLOUR TEMPERATURE	CRI	TC LIFETIME	BEAM ANGLE
3031.480.25.Δ	PAR20	MasterLED	480LM	5,5W	87LM/W	2700K	>80	45.000 Hrs	25°
3031.480.40.Δ	PAR20	MasterLED	480LM	5,5W	87LM/W	2700K	>80	45.000 Hrs	40°
3031.490.25.Δ	PAR20	MasterLED	490LM	5,5W	89LM/W	3000K	>80	45.000 Hrs	25°
3031.490.40.Δ	PAR20	MasterLED	490LM	5,5W	89LM/W	3000K	>80	45.000 Hrs	40°
3031.520.25.Δ	PAR20	MasterLED	520LM	5,5W	94LM/W	4000K	>80	45.000 Hrs	25°
3031.520.40.Δ	PAR20	MasterLED	520LM	5,5W	94LM/W	4000K	>80	45.000 Hrs	40°

Δ see color