



PRODUCT MATERIAL	Die-cast aluminium
LIGHT SOURCE	Bridgelux
MODULE LIFETIME	Approx. 35.000 hours
LED COOLING	Passive cooling
DRIVER	Incl. Phasecut DIM driver
COLORS (Δ)	○ 3 = White ● 5 = Black
BEAM ANGLE	22°
ADJUSTABLE	Yes - 0-60° - 360°
SIZE	See technical drawings



OPTIONS

OPTIONAL BEAM ANGLE	36° art. no.: 4912.999.38.9	€ 5,00
REFLECTOR RING	White reflector ring art. no.: 4912.922.99.3	€ 9,50
	gold reflector ring art. no.: 4912.922.99.9	€ 9,50
GLASS	Transparent art. no.: 4912.933.99.0	€ 7,50
	Honey comb art. no.: 4912.933.94.0	€ 7,50
	Frosted art. no.: 4912.933.90.0	€ 7,50
	Linear art. no.: 4912.933.96.0	€ 7,50

INFORMATION


WARRANTY	3 Years
-----------------	---------

Δ = product color code. See colors


Including standard black reflector ring

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and lightsources.

PINO CLICK 1

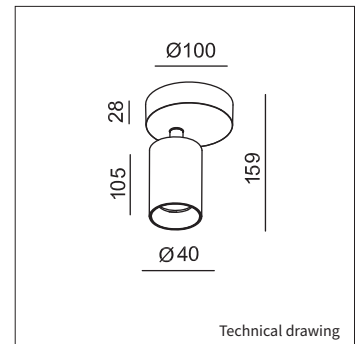

Reflector rings



Transparent Linear Frosted Honeycomb

ART.NR.	LAMP TYPE	BRAND	LUMINOUS FLUX	OUTPUT POWER	MODULE EFFICIENCY	COLOUR TEMPERATURE	CRI	TC LIFETIME	mA
5032.001.23.Δ	V8	Bridgelux	740LM	9W	82LM/W	2700K	>90	35.000 Hrs	500mA

Δ see colors