



**PROFILE 6 W**

<b>PRODUCT MATERIAL</b>	Aluminium profile
<b>LIGHT SOURCE</b>	Philips Ledline
<b>MODULE LIFETIME</b>	Approx. 50.000 hours
<b>LED COOLING</b>	Passive cooling
<b>DRIVER LEDLINE</b>	Incl. standard xitanium driver.
<b>COLORS (Δ)</b>	<ul style="list-style-type: none"> <li>○ 3 = RAL 9003 white</li> <li>● 5 = RAL 9005 black</li> <li>● 6 = RAL 9006 alu</li> </ul>
<b>REFLECTOR PLATE</b>	Opal diffuser or acrylic
<b>ADJUSTABLE</b>	No
<b>SIZE</b>	<b>1231 X 80 X 110MM</b>



**OPTIONS**

<b>COLORS</b>	Available in all RAL colours on request	
	Additional price + 10%	
<b>DIMMABLE</b>	Dimmable DALI	€ 60,00

**INFORMATION**


<b>WARRANTY</b>	5 Years
-----------------	---------

Δ see colors

Wall mounted direct/indirect LED luminaire.

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and lightsources. The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.

PROFILE 6 W

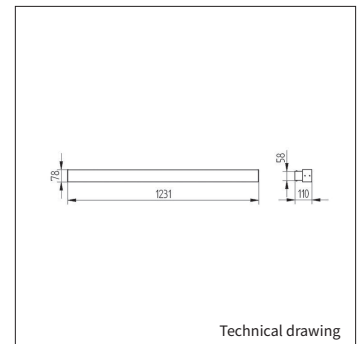

Technical drawing

P

ART.NR.	LAMP TYPE	BRAND	LUMINOUS FLUX	OUTPUT POWER	MODULE EFFICIENCY	COLOUR TEMPERATURE	CRI	TC LIFETIME	LENGTH
Δ see color									
9016.197.91Δ	Ledline	Philips	2X 2200LM	30W	147LM/W	3000K	>80	50.000 Hrs	1231MM
9016.198.91Δ	Ledline	Philips	2X 2200LM	30W	147LM/W	4000K	>80	50.000 Hrs	1231MM
9017.197.91Δ	Ledline	Philips	2X 4400LM	58W	151LM/W	3000K	>80	50.000 Hrs	1231MM
9017.198.91Δ	Ledline	Philips	2X 4400LM	58W	151LM/W	4000K	>80	50.000 Hrs	1231MM