



PROFILE 8

| | |
|-------------------------|----------------------------------------------------------------------------------------------------------------------------------|
| PRODUCT MATERIAL | Aluminium profile |
| LIGHT SOURCE | Philips Ledline |
| MODULE LIFETIME | Approx. 50.000 hours |
| LED COOLING | Passive cooling |
| DRIVER LEDLINE | Incl. standard xitanium driver. |
| COLORS (Δ) | <ul style="list-style-type: none"> ○ 3 = RAL 9003 white ● 5 = RAL 9005 black ● 6 = RAL 9006 alu |
| REFLECTOR PLATE | Opal diffuser or acrylic |
| ADJUSTABLE | No |
| SIZE | 586/867/1148/1429 X 80 X 76MM |

OPTIONS

| | | |
|-------------------------------|-----------------------------------------|----------|
| COLORS | Available in all RAL colours on request | |
| | Additional price + 10% | |
| DIMMABLE | Dimmable DALI on request | € 60,00 |
| EMERGENCY BALLAST | 0187.003.01 - 1 hour | € 180,00 |
| SUSPENSION SET / WIRES | 2 steel wires + power cable | € 45,00 |
| | length = 1500mm | |

INFORMATION


| | |
|-----------------|---------|
| WARRANTY | 5 Years |
|-----------------|---------|

Δ see colors


This luminaire can be mounted directly to the ceiling or pendent with steel wires and can be connected to form long LED lighting lines.

We can produce this luminaire in different lengths and shapes on request.

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and lightsources. The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.

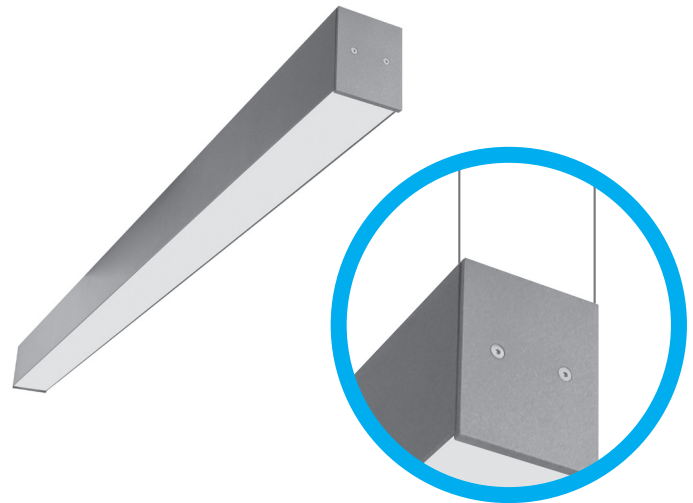

PROFILE 8

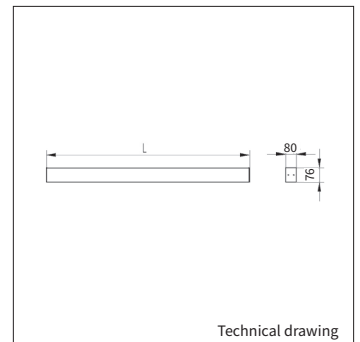

Technical drawing

| ART.NR. | LAMP TYPE | BRAND | LUMINOUS FLUX | OUTPUT POWER | MODULE EFFICIENCY | COLOUR TEMPERATURE | CRI | TC LIFETIME | LENGTH |
|--------------|-----------|---------|---------------|--------------|-------------------|--------------------|-----|-------------|--------|
| Δ see color | | | | | | | | | |
| 9015.197.91Δ | Ledline | Philips | 2200LM | 15W | 146LM/W | 3000K | >80 | 50.000 Hrs | 586MM |
| 9015.198.91Δ | Ledline | Philips | 2200LM | 15W | 146LM/W | 4000K | >80 | 50.000 Hrs | 586MM |
| 9015.295.91Δ | Ledline | Philips | 3300LM | 23W | 143LM/W | 3000K | >80 | 50.000 Hrs | 876MM |
| 9015.296.91Δ | Ledline | Philips | 3300LM | 23W | 143LM/W | 4000K | >80 | 50.000 Hrs | 876MM |
| 9015.197.91Δ | Ledline | Philips | 4400LM | 30W | 146LM/W | 3000K | >80 | 50.000 Hrs | 1148MM |
| 9015.198.91Δ | Ledline | Philips | 4400LM | 30W | 146LM/W | 4000K | >80 | 50.000 Hrs | 1148MM |
| 9015.291.91Δ | Ledline | Philips | 5500LM | 38W | 144LM/W | 3000K | >80 | 50.000 Hrs | 1429MM |
| 9015.292.91Δ | Ledline | Philips | 5500LM | 38W | 144LM/W | 4000K | >80 | 50.000 Hrs | 1429MM |
| 9015.197.91Δ | Ledline | Philips | 8000LM | 58W | 138LM/W | 3000K | >80 | 50.000 Hrs | 1429MM |
| 9015.198.91Δ | Ledline | Philips | 8000LM | 58W | 138LM/W | 4000K | >80 | 50.000 Hrs | 1429MM |
| 9015.293.91Δ | Ledline | Philips | 10.000LM | 73W | 137LM/W | 3000K | >80 | 50.000 Hrs | 1429MM |
| 9015.294.91Δ | Ledline | Philips | 10.000LM | 73W | 137LM/W | 4000K | >80 | 50.000 Hrs | 1429MM |