



PRODUCT MATERIAL	Steel
LIGHT SOURCE	MR16 / GU10 / LMR50
DRIVER	LMR 50 includes a driver
COLORS (Δ)	<ul style="list-style-type: none"> ○ 3 = RAL 9003 white ● 77 = RAL 7037 Light grey ● 7 = RAL 7043 Antracit ● 5 = RAL 9005 black
BEAM ANGLE	LMR: 20° / 30°
ADJUSTABLE	Yes
SIZE	240 X 115 X 115MM



OPTIONS LMR

COLORS	Available in all RAL colours and color combinations on request. Additional price + 10% The standard colors, as stated above, can be combined with the fixture inside/outside. No additional price.		
GLASS COVER CLEAR	LMR50 2x glass IP44 art. no.: 0053.999.99.0	€	15,00
DIMMABLE DRIVERS 350mA <small>IN COMBINATION WITH THIS LUMINAIRE. ADDITIONAL PRICE.</small>	1/10v Dimmable 350mA 20W art. no.: 0137.110.20.0	€	63,00
	Phase-cut Dimmable 350mA 18W art. no.: 0115.350.18.1	€	29,00
	Dimmable DALI 350mA 18W art. no.: 0118.350.75.0	€	55,00




QUBIC 2

INFORMATION

! Only luminaire body, lightsource and/or driver excluded.

LMR includes a driver, cable and plug.

LMR **Dim to Warm** includes a dimmable driver, cable and plug.

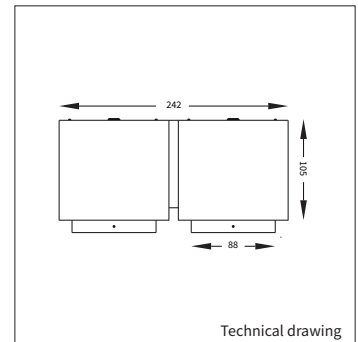

Technical drawing

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and lightsources.

ART.NR.	LAMP TYPE	BRAND	LUMINOUS FLUX	OUTPUT POWER	MODULE EFFICIENCY	COLOUR TEMPERATURE	CRI	TC LIFETIME	BEAM ANGLE	mA
Δ see colors										
4613.001.98.Δ	MR16	~	~	Max. 50W	~	~	~	~	~	~
4613.002.98.Δ	Gu10	~	~	Max. 50W	~	~	~	~	~	~
4613.171.20.Δ	LMR50	Bridgelux V6	2x 575LM	2x 6,8W	85LM/W	2700K	>90	30.000 Hrs	20°	350
4613.172.30.Δ	LMR50	Bridgelux V6	2x 575LM	2x 6,8W	85LM/W	2700K	>90	30.000 Hrs	30°	350
4613.173.20.Δ	LMR50	Bridgelux V6	2x 600LM	2x 6,8W	88LM/W	3000K	>90	30.000 Hrs	20°	350
4613.174.30.Δ	LMR50	Bridgelux V6	2x 600LM	2x 6,8W	88LM/W	3000K	>90	30.000 Hrs	30°	350
4613.175.20.Δ	LMR50	Sharp GW6	2x 563LM	2x 6,6W	85LM/W	2000 - 2800K DTW	>80	30.000 Hrs	20°	350
4613.176.30.Δ	LMR50	Sharp GW6	2x 563LM	2x 6,6W	85LM/W	2000 - 2800K DTW	>80	30.000 Hrs	30°	350