



PRODUCT MATERIAL	Steel
LIGHT SOURCE	MR16 / GU10 / LMR50
DRIVER	LMR 50 includes a driver
COLORS (Δ)	<ul style="list-style-type: none"> ○ 3 = RAL 9003 white ● 77 = RAL 7037 Light grey ● 7 = RAL 7043 Antracit ● 5 = RAL 9005 black
BEAM ANGLE	LMR: 20° / 30°
ADJUSTABLE	Yes
SIZE	240 X 240 X 123MM



OPTIONS LMR

COLORS	<p>The standard colors, as stated above, can be combined with the fixture inside/outside. No additional price.</p> <p>Available in all RAL colours and color combinations on request. Additional price + 10%</p>		
GLASS COVER CLEAR	LMR50 4x glass IP44	€	30,00
	art. no.: 0053.999.99.0		
DIMMABLE DRIVERS	Available on request		




QUBIC 4

INFORMATION

- ! LMR including cable, plug, connection cable and driver.
- Only luminaire body, lightsource and/or driver excluded.
- LMR **Dim to Warm** includes a dimmable driver, cable and plug.

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and lightsources.

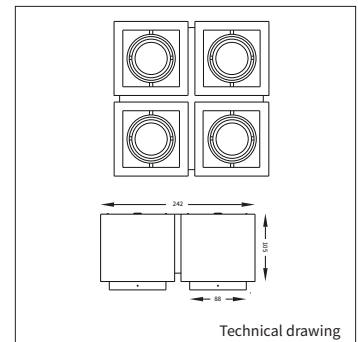

ART.NR.	LAMP TYPE	BRAND	LUMINOUS FLUX	OUTPUT POWER	MODULE EFFICIENCY	COLOUR TEMPERATURE	CRI	TC LIFETIME	BEAM ANGLE	mA
Δ see colors										
! 4615.001.98.Δ	MR16	~	~	Max. 50W	~	~	~	~	~	~
! 4615.002.98.Δ	Gu10	~	~	Max. 50W	~	~	~	~	~	~
4615.171.20.Δ	LMR50	Bridgelux V6	4x 575LM	4x 6,8W	85LM/W	2700K	>90	30.000 Hrs	20°	350
4615.172.30.Δ	LMR50	Bridgelux V6	4x 575LM	4x 6,8W	85LM/W	2700K	>90	30.000 Hrs	30°	350
4615.173.20.Δ	LMR50	Bridgelux V6	4x 600LM	4x 6,8W	88LM/W	3000K	>90	30.000 Hrs	20°	350
4615.174.30.Δ	LMR50	Bridgelux V6	4x 600LM	4x 6,8W	88LM/W	3000K	>90	30.000 Hrs	30°	350
4615.175.20.Δ	LMR50	Sharp GW6	4x 563LM	4x 6,6W	85LM/W	2000 - 2800K DTW	>80	30.000 Hrs	20°	350
4615.176.30.Δ	LMR50	Sharp GW6	4x 563LM	4x 6,6W	85LM/W	2000 - 2800K DTW	>80	30.000 Hrs	30°	350