



TRIMLESS 11

<b>PRODUCT MATERIAL</b>	Steel
<b>LIGHT SOURCE</b>	QR111 LED / G53
<b>DRIVER</b>	Including driver
<b>COLORS (Δ)</b>	<ul style="list-style-type: none"> <li>○ 3 = RAL 9003 white</li> <li>● 5 = RAL 9005 black</li> <li>● 6 = RAL 9006 alu</li> </ul>
<b>BEAM ANGLE</b>	
<b>ADJUSTABLE</b>	Yes
<b>SIZE</b>	147 X 147 X 80.5MM



OPTIONS

<b>COLORS</b>	Available in all RAL colours and combinations on request. Additional price + 10%
---------------	----------------------------------------------------------------------------------



INFORMATION

**!** Only luminaire body, lightsource and/or driver excluded.

**Dim to Warm** Includes a dimmable driver

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and lightsources.

TRIMLESS 11

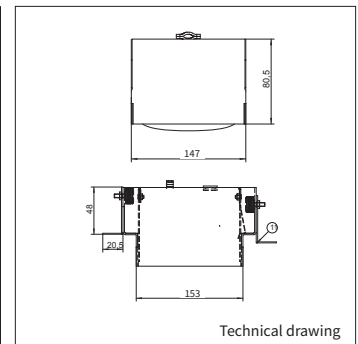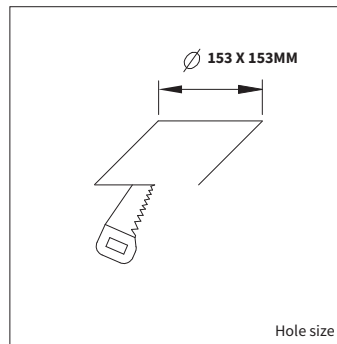

ART.NR.	LAMP TYPE	BRAND	LUMINOUS FLUX	OUTPUT POWER	MODULE EFFICIENCY	COLOUR TEMPERATURE	CRI	TC LIFETIME	BEAM ANGLE	mA
Δ see colors										
<b>!</b> 4607.999.99.Δ	QR111 / G53	~	~	Max. 50W	~	~	~	~	~	~
4607.605.24.Δ	QR111 LED / G53	KL	500LM	10W	50LM/W	2800K	>90	30.000 Hrs	24°	500mA
4607.606.24.Δ	QR111 LED / G53	KL	750LM	15W	50LM/W	2800K	>90	30.000 Hrs	24°	350mA
4607.606.40.Δ	QR111 LED / G53	KL	750LM	15W	50LM/W	2800K	>90	30.000 Hrs	40°	350mA
4607.175.24.Δ	QR111 LED / G53	KL	700LM	15W	46LM/W	2000 - 2900K	>96	35.000 Hrs	24°	350mA
4607.175.45.Δ	QR111 LED / G53	KL	700LM	15W	46LM/W	2000 - 2900K	>96	35.000 Hrs	45°	350mA