



<b>PRODUCT MATERIAL</b>	Die-cast aluminium
<b>LIGHT SOURCE</b>	Street LED
<b>MODULE LIFETIME</b>	Approx. 60.000 hours
<b>LED COOLING</b>	Passive cooling
<b>DRIVER</b>	Incl. Xitanium driver.
<b>COLORS</b>	<ul style="list-style-type: none"> <li>● 6 = RAL 9006 alu</li> <li>● 7 = RAL 9007 grey</li> <li>● 2 = RAL 7138</li> </ul>
<b>BEAM ANGLE</b>	Wide angle.
<b>SIZE</b>	200 X 1000 / 1500 / 3000MM

**OPTIONS**

<b>COLORS</b>	Available in all RAL colours on request Additional price + 10%
---------------	---

**INFORMATION**

<b>WARRANTY</b>	5 Years
-----------------	---------

Incl. Frosted Glass.


Available with 6 different versions of optic lenses.

Safety class: 1  
I.K. 08

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and lightsources. The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.



EMPIRE

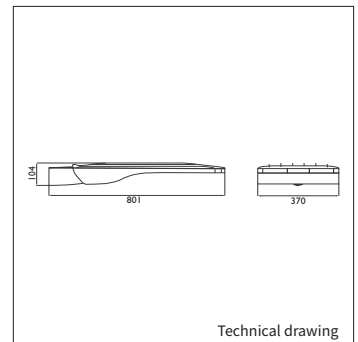

ART.NR.	LAMP TYPE	BRAND	LUMINOUS FLUX	OUTPUT POWER	MODULE EFFICIENCY	COLOUR TEMPERATURE	CRI	TC LIFETIME	POWER FACTOR
8090.300.72.Δ	STREET LED	Philips	10500LM	72W	145LM/W	3000K	>70	50.000 Hrs	>0,9
8090.400.72.Δ	STREET LED	Philips	10500LM	72W	145LM/W	4000K	>70	50.000 Hrs	>0,9
8090.570.72.Δ	STREET LED	Philips	10500LM	72W	145LM/W	5700K	>70	50.000 Hrs	>0,9
8091.300.96.Δ	STREET LED	Philips	14000LM	96W	145LM/W	3000K	>70	50.000 Hrs	>0,9
8091.400.96.Δ	STREET LED	Philips	14000LM	96W	145LM/W	4000K	>70	50.000 Hrs	>0,9
8091.570.96.Δ	STREET LED	Philips	14000LM	96W	145LM/W	5700K	>70	50.000 Hrs	>0,9
8092.400.12.Δ	STREET LED	Philips	17500LM	120W	145LM/W	3000K	>70	50.000 Hrs	>0,9
8092.570.12.Δ	STREET LED	Philips	17500LM	120W	145LM/W	4000K	>70	50.000 Hrs	>0,9
8092.400.12.Δ	STREET LED	Philips	17500LM	120W	145LM/W	5700K	>70	50.000 Hrs	>0,9